
100% dielectric gratings offer unbeatable environmental and thermal stability combined with high efficiency, low PDL performance



Polarization independent (PING) telecom gratings from lbsen are produced by holographic/lithographic stepper technology in 100% dielectric materials. This leads to unbeatable thermal and environmental stability, with no polymers, epoxies, gelatins or metals in the optical path nor in the grating whatsoever.

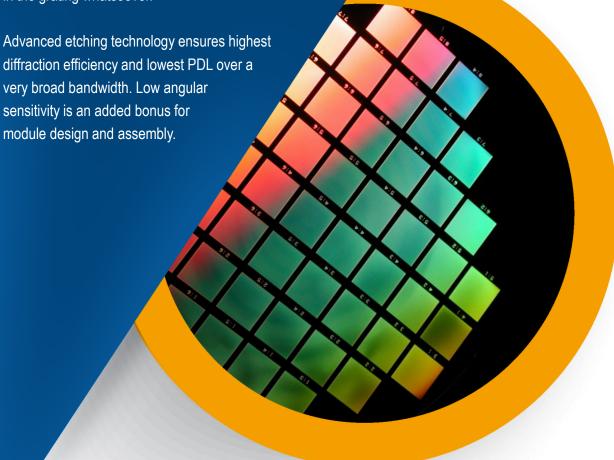

PING Grating


1000 I/mm PING for telecom C-band

PING-Sample-083

1000 I/mm PING Grating for telecom C-band

PING-Sample-083

Benefits High efficiency, low PDL, broad spectral bandwidth Transmission gratings give much greater alignment tolerances Low transmitted wavefront distortion High tolerance to illumination angle of incidence Two grating designs are possible, offering compact design possibilities Unbeatable thermal & environmental stability & lifetime




Parameter	Specification
Materials	100% dielectric materials
Grating area	19 mm x 13.5 mm
Chip size	21 mm x 15 mm
Chip thickness	0.625 mm
Grating resolution	1000 l/mm
PDL	<0.25 dB
Angle of incidence (AOI)	49.9 degrees
Diffraction efficiency (TE & TM)	>90%
Bandwidth	1525 nm – 1565 nm
Production technology	Holographic/lithographic stepper and RIE etching
Maximum operating temperature	>500 degrees C
Pagkaging and shipment	Gelpak containers. Manufactured and sealed in class 10 cleanroom
Cleaning recommendation	First contact. Available from Photonic Cleaning




1000 I/mm PING Grating for telecom C-band

PING-Sample-083

Typical grating performance

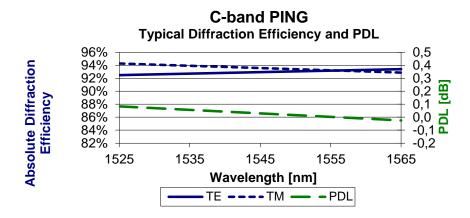

Diffraction efficiency vs incident angle

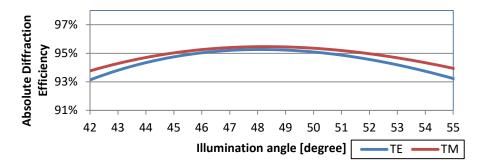





1000 I/mm PING Grating for telecom C-band

PING-Sample-083

Configuration/Definitions

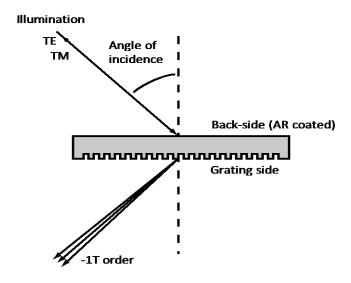

Drawing

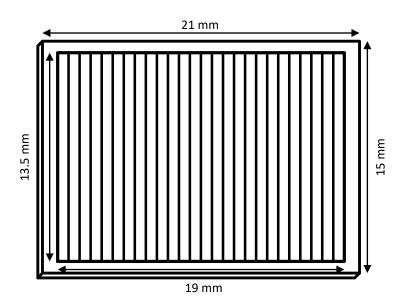

Specifications are subject to change without notice.

The above grating is an example of Ibsen's capabilities. Ibsen operates as grating partner for our customers, from being an integrated part of the grating and device / instrument design phase, to the manufacturing of prototypes, to volume manufacturing of OEM gratings.

