Fused silica transmission grating technology offers unbeatable energy/ power damage threshold combined with high-efficiency spectral performance



As femtosecond laser systems advance to ever increasing energy levels, demands to the energy/power handling capabilities of pulse compression gratings increase. Ibsen manufactures 100% fused silica pulse compression gratings that offer unbeatable energy/power handling capacity, combined with high-efficiency, low wavefront distortion performance.

Pulse compression gratings from Ibsen build on Ibsen's world leading position in fused silica transmission gratings, utilizing state-of-the art interferometric patterning technologies and advanced reactive ion etching technology. Gratings are manufactured on custom/ OEM basis, but an increasing number of gratings are stock available, such as the grating described in this product sheet.

Pulse Compression Grating


1250 l/mm for 1030 – 1064 nm

PCG-1250-10XX-984

1250 l/mm for 1030 – 1064 nm


PCG-1250-10XX-984

Benefits	
Highest energy/power damage threshold	
Environmentally and thermally stable	
High diffraction efficiency	
High tolerance to incidence angle	
Low transmitted wavefront distortion	



Parameter	Specification
Material	Fused silica and high-power, dielectric AR coating materials
Grating area	15 mm x 9 mm
Substrate size	30 mm x 25 mm x 1 mm
Grating resolution	1250 l/mm
Grating period	800.0 nm +/- 0.1 nm
Dispersion at 1064 nm	0.096 deg/nm
Nominal wavelength	1030 - 1064 nm
Angle of incidence (AOI)	Littrow (41.7 deg)
Diffraction efficiency (TE)	>93%
Back-side AR coating	High power, dielectric AR coating applied
Production technology	2-beam Interferometry and Reactive Ion Etch, Class 10 cleanroom environment
Energy/power damage threshold	http://ibsen.com/products/transmission-gratings/high-power-gratings

Typical Grating Performance

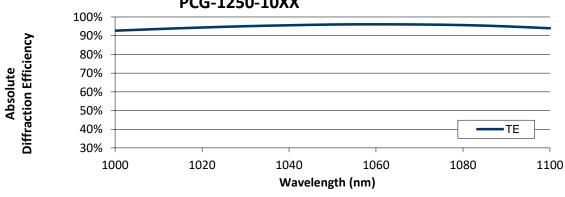

PCG-1250-10XX



For further information you can contact us directly at:

Ibsen Photonics A/S Phone +45 4434 7000

Ryttermarken 15-21 Fax +45 4434 7001


DK-3520 Farum www.ibsen.com

Denmark E-mail inquiry@ibsen.com


1250 l/mm for 1030 – 1064 nm

PCG-1250-10XX-984

Configuration/definitions

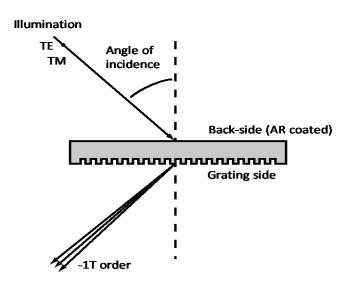

Drawing

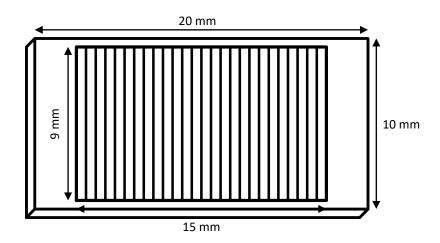

Specifications are subject to change without notice.

The above grating is an example of Ibsen's capabilities. Ibsen operates as grating partner for our customers, from being an integrated part of the grating and device / instrument design phase, to the manufacturing of prototypes, to volume manufacturing of OEM gratings.



For further information you can contact us directly at:

Ibsen Photonics A/S Phone +45 4434 7000 Ryttermarken 15-21 Fax +45 4434 7001 DK-3520 Farum www.ibsen.com Denmark E-mail inquiry@ibsen.com