


Ibsen Fused silica transmission grating technology offers unbeatable energy/power damage threshold combined with high-efficiency spectral performance



As femtosecond laser systems advance to ever increasing energy levels, demands to the energy/power handling capabilities of pulse compression gratings increase. Ibsen manufactures 100% fused silica pulse compression gratings that offer unbeatable energy/power handling capacity, combined with high-efficiency, low wavefront distortion performance.

Pulse compression gratings from Ibsen build on Ibsen's world leading position in fused silica transmission gratings, utilizing state-of-the-art interferometric patterning technologies and advanced reactive ion etching technology. Gratings are manufactured on custom/OEM basis, but an increasing number of gratings are stock available, such as the grating described in this product sheet

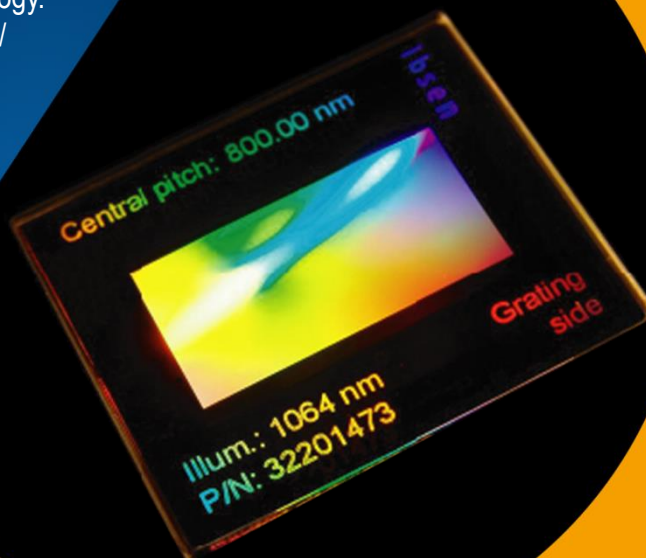

Pulse Compression Grating


1379 l/mm for 500-700 nm

PCG-1379/600-961

1379 l/mm for 500-700 nm


PCG-1379/600-961

Benefits
Highest energy/power damage threshold
Environmentally and thermally stable
High diffraction efficiency
High tolerance to incidence angle
Low transmitted wavefront distortion

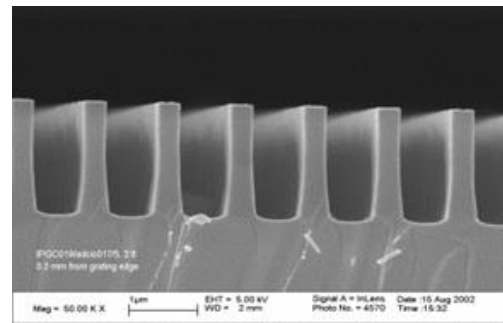

Parameter	Specification
Material	Fused silica and high-power, dielectric AR coating materials
Grating area	20 mm x 20 mm
Substrate size	22 mm x 25 mm x 1 mm
Grating resolution	1379 l/mm
Dispersion at 600 nm	0.112 deg/nm
Nominal wavelength	600 nm
Angle of incidence (AOI)	Littrow (20 deg)
Diffraction efficiency (TE)	> 70%
Back-side AR coating	High power, dielectric AR coating applied
Energy/power damage threshold	http://ibsen.com/products/transmission-gratings/high-power-gratings


Typical Grating Performance

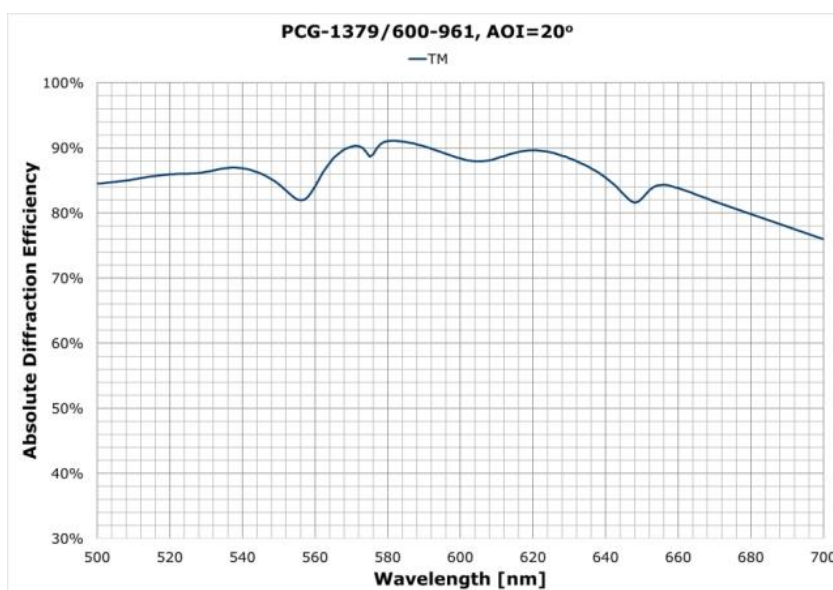


1379 l/mm for 600 nm

PCG-1379/600-961

Configuration / definitions

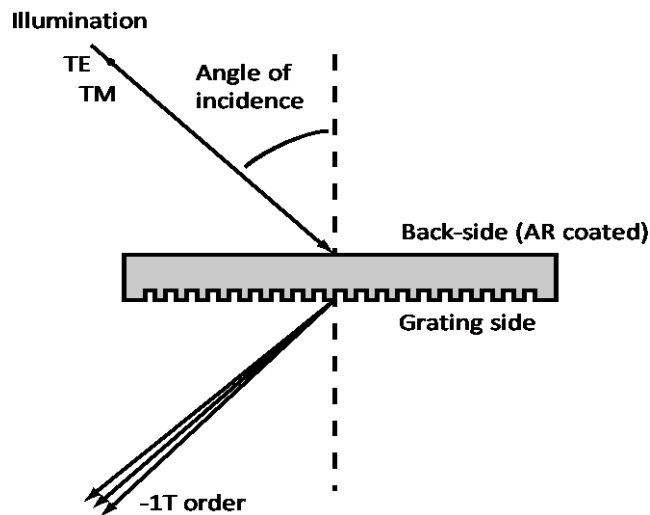

Drawing

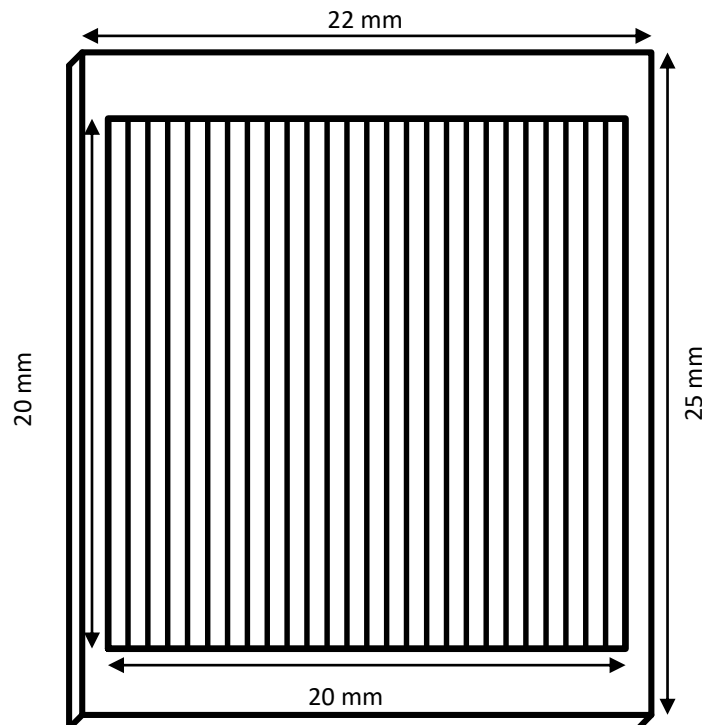

Specifications are subject to change without notice.

The above grating is an example of Ibsen's capabilities. Ibsen operates as grating partner for our customers, from being an integrated part of the grating and device / instrument design phase, to the manufacturing of prototypes, to volume manufacturing of OEM gratings.