100% dielectric gratings offer unbeatable environmental and thermal stability combined with high efficiency, low PDL performance



Polarization independent (PING) telecom gratings from Ibsen are produced by holographic/lithographic stepper technology in 100% dielectric materials. This leads to unbeatable thermal and environmental stability, with no polymers, epoxies, gelatins or metals in the optical path nor in the grating whatsoever.



PING Grating


600 I/mm PING for Telecom C-band

PING-600-045

600 I/mm PING for Telecom C-band

PING-600-045

Benefits	
High efficiency, low PDL, broad spectral bandwidth	
Transmission gratings give much greater alignment tolerances	
Low transmitted wavefront distortion	
High tolerance to illumination angle of incidence	
Two grating designs are possible, offering compact design possibilities	
Unbeatable thermal & environmental stability & lifetime	

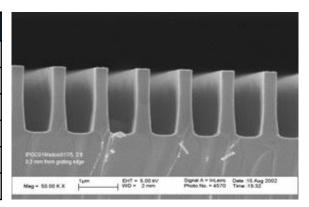


Parameter	Specification
Materials	100% dielectric materials
Grating area	40 mm x 40 mm
Chip size	42 mm x 42 mm
Chip thickness	1 mm
Grating resolution	600 I/mm
PDL	<0.25 dB
Angle of incidence (AOI)	27.7 degrees
Diffraction efficiency (TE & TM)	>90%
Bandwidth	1525 nm – 1575 nm
Production technology	Holographic/lithographic stepper and RIE etching
Maximum operating temperature	>500 degrees C
Pagkaging and shipment	Gelpak containers. Manufactured and sealed in class 10 cleanroom
Cleaning recommendation	First contact. Available from Photonic Cleaning




600 I/mm PING for Telecom C-band


PING-600-045

Typical Grating Performance



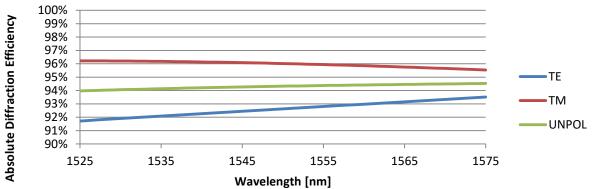

Diffraction Efficiency vs Incident Angle

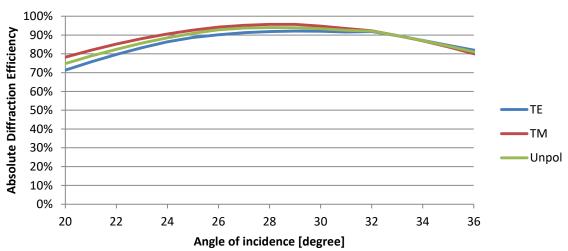





600 I/mm PING for Telecom C-band

PING-600-045

Configuration/Definitions

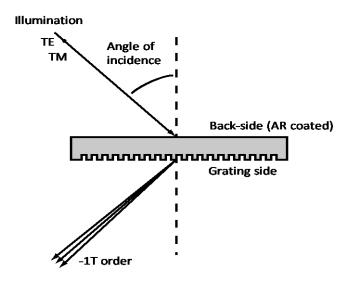

Drawing

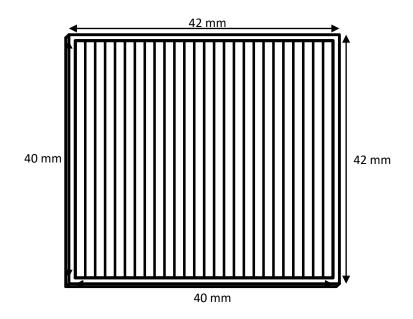

Specifications are subject to change without notice.

The above grating is an example of Ibsen's capabilities. Ibsen operates as grating partner for our customers, from being an integrated part of the grating and device / instrument design phase, to the manufacturing of prototypes, to volume manufacturing of OEM gratings.

